


A1S

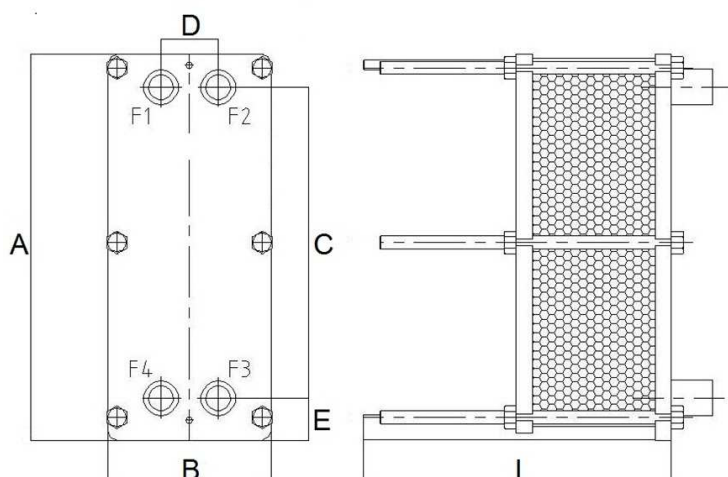

Conessioni Connections			
Lato caldo Hot side		Lato freddo Cold side	
Entrata Inlet	Uscita Outlet	Entrata Inlet	Uscita Outlet
F1	F4	F3	F2

Superficie Piastra Plate surface area	Diametro attacchi Connections size	Quota di serraggio Tightening measure	Volume canale Channel volume
m ²		mm	dm ³
0,042	1" ¼ gas M	Np x 2,90 (±0,5)	0,1725

Pressione max esercizio <i>Max working pressure</i>	A	B	C	D	E	L	Numero piastre <i>Number of plates</i>	Peso piastra <i>Plate weight</i>	Peso telaio <i>Frame weight</i>
bar	mm							kg	kg
PN10	473	190	381	70	52	330	Np≤54	0,24	26
						530	55<88		27
PN16	473	190	381	70	52	330	Np≤54		32
						530	55<88		33

Componenti Components	Esecuzione standard Standard version	Esecuzione su richiesta Version on request
Piastra Plates	Acciaio inox aisi 316 Stainless steel 316	Titanio Titanium
Guarnizioni Gaskets	NBR HT (max 120°C) EPDM HT (max 150°C)	FKM (max 180°C)
Telaio Frame	Acciaio al carbonio verniciato Painted carbon steel	Acciaio inox aisi 304 Stainless steel 304