


A3M

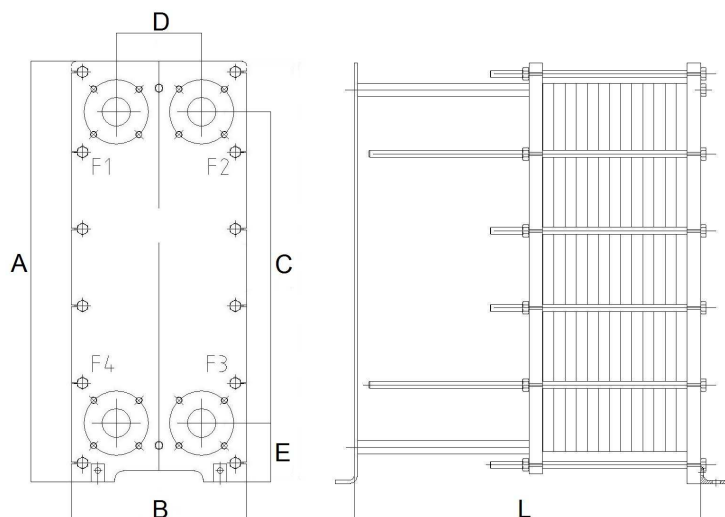

Conessioni Connections			
Lato caldo Hot side		Lato freddo Cold side	
Entrata Inlet	Uscita Outlet	Entrata Inlet	Uscita Outlet
F1	F4	F3	F2

Superficie Piastra Plate surface area	Diametro attacchi Connections size	Quota di serraggio Tightening measure	Volume canale Channel volume
m ²		mm	dm ³
0,223	DN 65	Np x 2,70 (±0,5)	0,6

Pressione max esercizio Max working pressure	A	B	C	D	E	L	Numero piastre Number of plates	Peso piastra Plate weight	Peso telaio Frame weight
bar	mm							kg	kg
PN10	946	395	700	192	132	335	Np≤63	0,89	152
						535	64<105		157
						735	106<147		162
						1035	148<210		167
PN16	946	395	700	192	132	345	Np≤63	1,10	198
						545	64<105		206
						745	106<147		214
						1045	148<210		219

Componenti Components	Esecuzione standard Standard version	Esecuzione su richiesta Version on request
Piastra Plates	Acciaio inox aisi 304/316 Stainless steel 304/316	Titanio Titanium
Guarnizioni Gaskets	NBR HT (max 120°C) EPDM HT (max 150°C)	FKM (max 180°C)
Telaio Frame	Acciaio al carbonio verniciato Painted carbon steel	Acciaio inox aisi 304 Stainless steel 304