


A3S

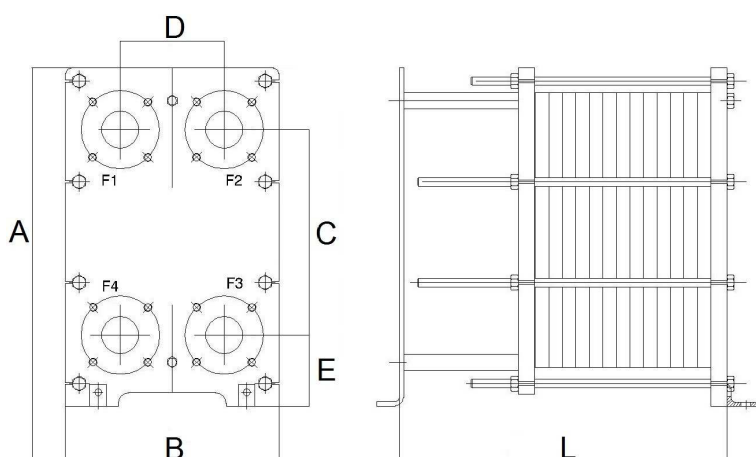

Conessioni Connections			
Lato caldo Hot side		Lato freddo Cold side	
Entrata Inlet	Uscita Outlet	Entrata Inlet	Uscita Outlet
F1	F4	F3	F2

Superficie Piastra Plate surface area	Diametro attacchi Connections size	Quota di serraggio Tightening measure	Volume canale Channel volume
m ²		mm	dm ³
0,103	DN 65	Np x 2,70 (±0,5)	0,3

Pressione max esercizio Max working pressure	A	B	C	D	E	L	Numero piastre Number of plates	Peso piastra Plate weight	Peso telaio Frame weight
bar	mm							kg	kg
PN10	626	395	380	192	132	333	Np≤63	0,59	96
						533	64<105		100
						733	106<147		103
						1033	148<210		109
PN16	626	395	380	192	132	338	Np≤63	0,72	116
						538	64<105		121
						738	106<147		125
						1038	148<210		130

Componenti Components	Esecuzione standard Standard version	Esecuzione su richiesta Version on request
Piastra Plates	Acciaio inox aisi 304/316 Stainless steel 304/316	Titanio Titanium
Guarnizioni Gaskets	NBR HT (max 120°C) EPDM HT (max 150°C)	FKM (max 180°C)
Telaio Frame	Acciaio al carbonio verniciato Painted carbon steel	Acciaio inox aisi 304 Stainless steel 304