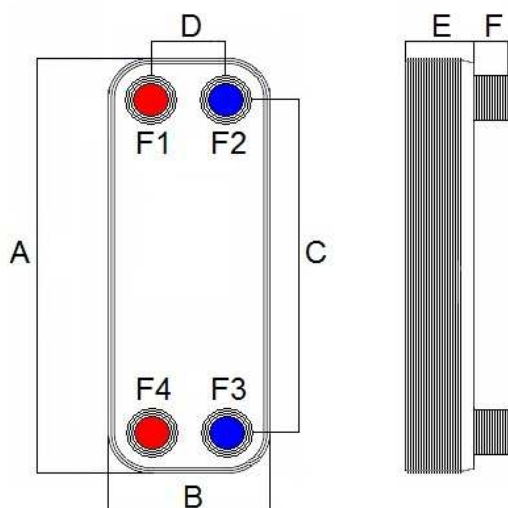


S16

Connessioni Connections			
Lato caldo Hot side		Lato freddo Cold side	
Entrata Inlet	Uscita Outlet	Entrata Inlet	Uscita Outlet
F1	F4	F3	F2

Superficie Piastra Plate surface area	Diametro attacchi Connections size	Peso Weight	Volume canale Channel volume
m ²	pollici	kg	dm ³
0,0383	1" Gas M	(Np x 0,1)+1,5	0,08

Pressione max esercizio Max working pressure	A	B	C	D	E	F
bar	mm					
PN 30	312	116	250	50	(Np x 2,3)+12	27

Componenti Components	Esecuzione standard Standard version
Piastra Plates	Acciaio inox aisi 316L Stainless steel 316L
Saldobrasatura Solder	Rame Cooper
Connessioni Connections	Acciaio inox aisi 316L Stainless steel 316L