


S182M



Scambiatori di calore a piastre saldobrasati

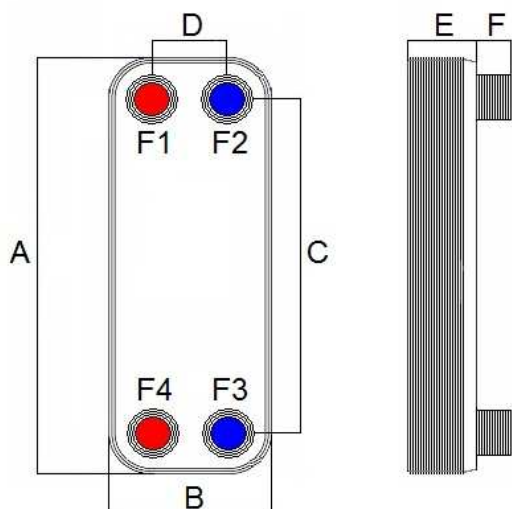

Connessioni
Connections

Lato caldo Hot side		Lato freddo Cold side	
Entrata Inlet	Uscita Outlet	Entrata Inlet	Uscita Outlet
F1	F4	F3	F2

Superficie Piastra Plate surface area				Diametro attacchi Connections size		Volume canale Channel volume		Peso Weight	
m ²				2" Gas M		dm ³		kg	
0,12						0,269		12+(0,36xNp)	
A	B	C	D	E	F	Temperatura max esercizio Max working temperature		Pressione max esercizio Max working pressure	
			mm			°C		bar	
622	197	519	94	18+(2,35xNp)	38	-100/+120		PN 30	

Np= numero piastre / number of plates

Componenti Components	Esecuzione standard Standard version
Piastre Plates	Acciaio inox aisi 316L stainless steel 316L
Saldobrasatura Solder	Rame 99,9% Copper 99,9%
Connessioni Connections	Acciaio inox aisi 316L stainless steel 316L