


S404M

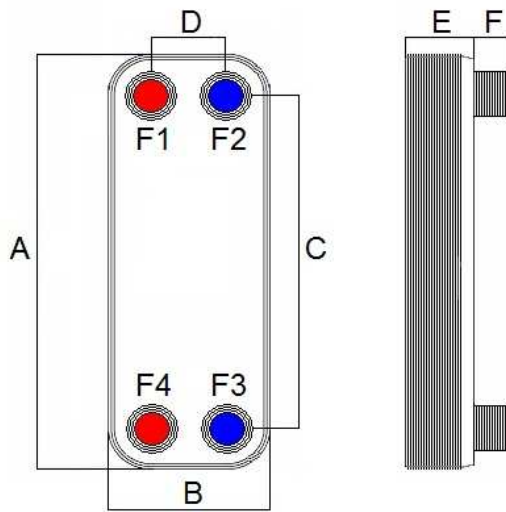

| Connessioni Connections | | | |
|----------------------------|------------------|--------------------------|------------------|
| Lato caldo Hot side | | Lato freddo Cold side | |
| Entrata Inlet | Uscita Outlet | Entrata Inlet | Uscita Outlet |
| F1 | F4 | F3 | F2 |

| Superficie Piastra Plate surface area | Diametro attacchi Connections size | Peso Weight | Volume canale Channel volume |
|--|---------------------------------------|----------------|---------------------------------|
| m ² | pollici | kg | dm ³ |
| 0,2427 | 3" Gas M | (Np x 0,67)+35 | 0,56 |

| Pressione max esercizio Max working pressure | A | B | C | D | E | F |
|---|-----|-----|-----|-----|----------------|----|
| bar | mm | | | | | |
| PN 30 | 745 | 305 | 620 | 178 | (Np x 2,85)+20 | 38 |

| Componenti Components | Esecuzione standard Standard version |
|----------------------------|--|
| Piastre Plates | Acciaio inox aisi 316L Stainless steel 316L |
| Saldobrasatura Solder | Rame Cooper |
| Connessioni Connections | Acciaio inox aisi 316L Stainless steel 316L |

Scambiatori di calore a piastre ispezionabili
Gasketed plate heat exchangers