




S82M

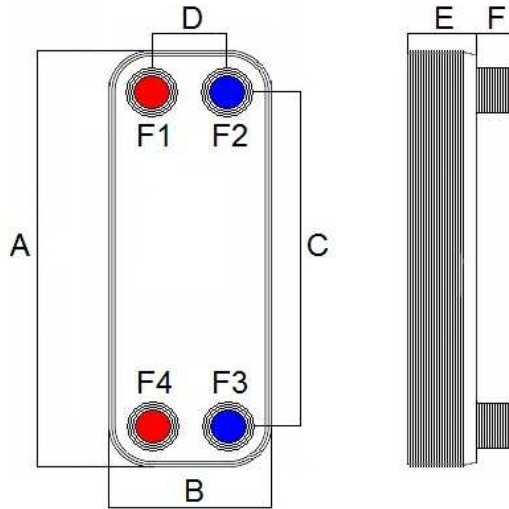

Connessioni Connections

Lato caldo Hot side		Lato freddo Cold side	
Entrata Inlet	Uscita Outlet	Entrata Inlet	Uscita Outlet
F1	F4	F3	F2

Scambiatori di calore a piastre
saldobrasati

Superficie Piastra Plate surface area				Diametro attacchi Connections size		Volume canale Channel volume	Peso Weight
m ²						dm ³	kg
0,062				1" 1/4 Gas M		0,122	2+(0,17xNp)
A	B	C	D	E	F	Temperatura max esercizio Max working temperature	Pressione max esercizio Max working pressure
						°C	bar
530	122	472	64	11+(2,15xNp)	27	-100/+120	PN 30

Np= numero piastre / number of plates

Componenti Components	Esecuzione standard Standard version
Piastre Plates	Acciaio inox aisi 316L stainless steel 316L
Saldobrasatura Solder	Rame 99,9% Copper 99,9%
Connessioni Connections	Acciaio inox aisi 316L stainless steel 316L